

New Product Bulletin

PERFORMANCE HEAT SHIELDING



PART NUMBER	DESCRIPTION	SIZES
UDN0.50BK	Silicone Sleeving Black	12mm Dia 1.2m Length
UDN0.50RD	Silicone Sleeving Red	12mm Dia 1.2m Length
UDN0.88BK	Silicone Sleeving Black	22mm Dia 1.2m Length
UDN0.88RD	Silicone Sleeving Red	22mm Dia 1.2m Length

Fire Flex Sleeving

- Temp range 260c
- Blister pack packaging
- Silicone jacketed fiberglass sleeving available in red or black

Applications

- Fuel line
- Starter cables
- Speedo cables
- Clutch cables
- Hydraulic lines



UDN0.50BK



UDN0.50RD



UDN0.88BK



UDN0.88RD



PART NUMBER	DESCRIPTION	SIZES
UEN0.63BK	Heat Resistant Sleeving Black	15mm Dia 1.8m Length
UEN0.63SV	Heat Resistant Sleeving Silver	15mm Dia 1.8m Length
UEN1.00BK	Heat Resistant Sleeving Black	25mm Dia 1.8m Length
UEN1.00SV	Heat Resistant Sleeving Silver	25mm Dia 1.8m Length

Insultherm Tube

- Temp range 650c
- Blister pack packaging
- Resin saturated heavy braided fibreglass

Applications


- Ignition leads
- Wiring harness



UEN0.63BK



UEN0.63SV

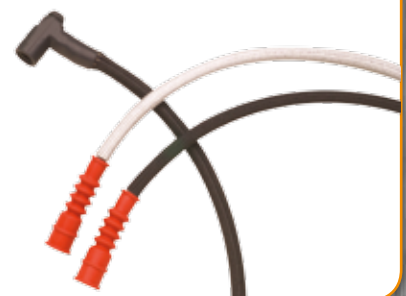

New Product Bulletin



PART NUMBER	DESCRIPTION	SIZES
UUN7.50BL	Spark Plug Boots Blue	L x 190mm 8 Per Pack
UUN7.50BK	Spark Plug Boots Black	L x 190mm 8 Per Pack
UUN7.50NT	Spark Plug Boots Natural	L x 190mm 8 Per Pack
UUN7.50RD	Spark Plug Boots Red	L x 190mm 8 Per Pack

Insultherm Spark Plug Boots

- Temp range 650c
- Blister pack packaging
- Braided fibreglass sleeve, double thickness
- Use SSS5.00SV4 to fix to plug boot

Applications

- Ignition leads



UUN7.50BL



UUN7.50BK



UUN7.50NT



UUN7.50RD



PART NUMBER	DESCRIPTION	SIZES
HFN2.00NT25	Exhaust Wrap Natural	7.6m x 50mm
HFN2.00BK25	Exhaust Wrap Black	7.6m x 50mm
HFN2.00NT50	Exhaust Wrap Natural	15m x 50mm
HFN2.00BK50	Exhaust Wrap Black	15m x 50mm

Insultherm Header Wrap

- Temp range 650c
- Plastic wrap packaging
- Vermiculite coated braided fiberglass
- Use SSS5.00SV4 to fix product to surface

Applications

- Headers / Extractors
- Induction pipes (Turbo cars)

PART NUMBER	DESCRIPTION	SIZES
HSN2.00NT20	Exhaust SI Wrap Natural	6m X 50mm

Insultherm Header Wrap SI

- Temp range 1090c
- Plastic wrap packaging
- Vermiculite coated braided fiberglass
- Use SSS5.00SV4 to fix product to surface

Applications

- Dump pipes (Turbo cars)
- High Flow Exhausts Systems

PART NUMBER	DESCRIPTION	SIZES
VWN2.00BA25	Volcano Exhaust Wrap Bronze	7.6m X 50mm
VWN2.00BA50	Volcano Exhaust Wrap Bronze	15m X 50mm

Volcano Exhaust Wrap Bronze

- Temp range 815c
- Vermiculite coated braided fiberglass
- Use SSS5.00SV4 to fix product to surface

Applications

- Motor Bike Exhausts (Coloured high temp wrap)
- Headers / Extractors



New Product Bulletin



UAN0.75SV



UAN1.25SV

PART NUMBER	DESCRIPTION	SIZES
UAN0.75SV	Tubing High Temp	1.2m x 12mm
UAN1.25SV	Tubing High Temp	1.2m x 34mm

Insultherm Header Wrap

- Temp range 650c
- Plastic pack packaging
- Vermiculite coated braided fiberglass
- Use SSS5.00SV4 to fix product to surface

Applications

- A/C hoses to the compressor
- Fuel line
- Battery cables



PART NUMBER	DESCRIPTION	SIZES
T6F0.50SV	Split Tubing High Temp Adhesive	1.2m x 13mm
T6F0.75SV	Split Tubing High Temp Adhesive	1.2m x 19mm
T6F1.00SV	Split Tubing High Temp Adhesive	1.2m x 25mm
T6F1.50SV	Split Tubing High Temp Adhesive	1.2m x 38mm
T6F2.00SV	Split Tubing High Temp Adhesive	1.2m x 50mm

Split Tubing High Temp Adhesive

- Temp range 760c
- Plastic wrapped
- High reflective aluminised exterior, combined with insulating fiberglass
- Includes high temperature adhesive strip that sets under heat

Applications

- Assembled A/C Hoses
- Battery cables



PART NUMBER	DESCRIPTION	SIZES
TSA-SML	Heat Shield High Flexibility	500 x 400mm Adhesive
TSA-LGE	Heat Shield High Flexibility	1000 x 500mm Adhesive
TS-SML	Heat Shield High Flexibility	500 x 400mm Non Adhesive
TS-LGE	Heat Shield High Flexibility	1000 x 500mm Non Adhesive

Heat Shield High Flexibility

- High Flexibility
- Reflects 95%+ of radiant energy

Applications

- Engine Bay components
- Washer bottles
- Fuse Boxes



Non Adhesive




Adhesive

New Product Bulletin


PERFORMANCE PRODUCTS

PART NUMBER	DESCRIPTION	SIZES
XT-ULT-LGE	Multi Layer Heat Shield	285 x 700mm
XT-ULT-SML	Multi Layer Heat Shield	300 x 230mm
XT-5000-SML	Multi Layer Heat Shield	300 x 230mm
XT-5000-LGE-1	Multi Layer Heat Shield	285 x 700mm



XT-ULT-SML



XT-5000-SML

Multi Layer Heat Shield



- Temp range up to 1100c (XT-ULT-LGE & XT-ULT-SML)
- Temp range up to 1000c (XT-5000-SML)
- Stainless steel construction
- Use SSS5.00SV4 and TF-RIVET-5 to fix product to the surface

Applications

- Designed to mount directly to exhausts manifolds and turbo systems


PERFORMANCE PRODUCTS

PART NUMBER	DESCRIPTION	SIZES
XT-5000-TUR-30-1	Turbo Shield GT30	Temp range up to 1000c
TF-600-STR-1	Heat Shield for Starter	Suit Non Reduction Starter
XT-5000-STR	Heat Shield for Starter	Suit Reduction Starter

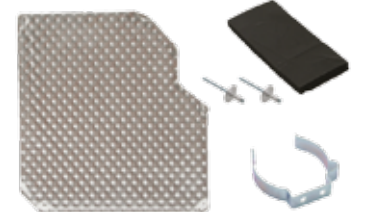

Fitting Kits

- Temp range up to 1000c
- Flexibility allows product to be moulded to the surface
- Fitting Kits included

Applications

- Starter Motors and Turbos


PERFORMANCE PRODUCTS

PART NUMBER	DESCRIPTION	SIZES
TF-CLAMP-3	Clamps to Suit Heat Shields	3 Per Pack
TF-CLAMP-5	Clamps to Suit Heat Shields	5 Per Pack
SSS5.00SV4	Ties to Suit Heat Shields	4 Per Pack 127mm
SSS7.50SV4	Ties to Suit Heat Shields	4 Per Pack 190mm
TF-RIVET-5	Rivets to Suit Heat Shields	5 Per Pack



Fitment Products

- Temp range up to 1000c
- Used in fitment of most products

Applications

- Used where required