

New Product Bulletin 13 2014



CoolDrive are pleased to introduce a new range of LED Emergency lighting.

The Jaylec range operates on a low current draw while still delivering fantastic light output. The voltage of the LS9780, LS9785, LS9787, LS9790 and LS9795 is 12-80V. The voltage of the LS9784, is 12-24V. All Jaylec LED Beacons feature a rotating flash pattern and are available in a 3 bolt mount that comes in aluminium or plastic, or a 2 bolt mount that comes in plastic or magnetic or a rubber pole mount.

LS9780 Amber LED Rotating Beacon. (Tall Lens)

The LS9780 has a 3 bolt aluminium mounting base

Features:

Flash Pattern:	Rotating
Lens Colour:	Amber
Lens Type:	142mm Polycarbonate twist on/off
Number of LED's:	40 x White LED's
Voltage:	12-80 Volt
Current Draw:	0.25amps @ 12 Volt and 0.125amps @ 24 Volt
Mounting:	3 Bolt
Housing:	Aluminium
Connections:	Red = Positive. Black = Negative
Dimensions:	Height: 157mm. Base Width: 163mm. Lens Width: 123mm
Warranty:	1 year
Approvals:	CE Approval



The Jaylec range is a low cost and affordable option for CoolDrive customers who work in tough conditions and need to replace beacons in a timely manner. Installation is hassle free with only two wires - positive and negative - making this convenient for customers when it comes to replacing beacons. This range meets CE approvals and is backed by a one year warranty.

LS9784 Amber LED Rotating Beacon.

The LS9784 has a flexible rubber pole mount.

Features:

Flash Pattern:	Rotating
Lens Colour:	Amber
Lens Type:	168mm Polycarbonate twist on/off
Number of LED's:	15 x Amber LED's
Voltage:	12-24 Volt
Current Draw:	0.3amps @ 12 Volt and 0.15amps @ 24 Volt
Mounting:	Flexible rubber pole
Housing:	Plastic
Connections:	2 pole socket mount
Dimensions:	Height: 228mm. Width: 137mm.
Warranty:	1 year
Approvals:	CE Approval




LS9785 Amber LED Rotating Beacon. (Short Lens)

The LS9785 has a 3 bolt plastic mounting base.

Features:

Flash Pattern:	Rotating
Lens Colour:	Amber
Lens Type:	69mm Polycarbonate twist on/off
Number of LED's:	15 x Amber LED's
Voltage:	12-80 Volt
Current Draw:	0.07amps @ 12 Volt and 0.035amps @ 24 Volt
Mounting:	3 Bolt
Housing:	Plastic
Connections:	Red = Positive. Black = Negative.
Dimensions:	Height: 93mm. Base Width: 130mm. Lens Width: 85mm
Warranty:	1 year
Approvals:	CE Approval

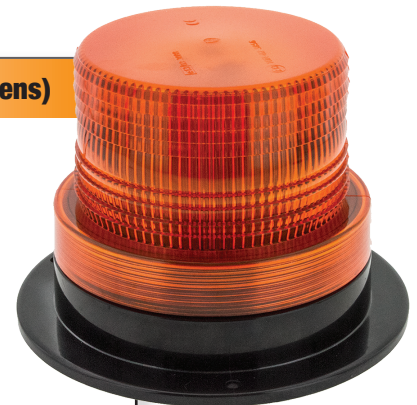

email sales@cooldrive.com.au web: www.cooldrive.com.au

New Product Bulletin 13 2014

CoolDrive are pleased to introduce a new range of LED Emergency lighting.



LS9787 Amber LED Rotating Beacon. (Short Lens)

The LS9787 has a magnetic mount plastic base.

Features:

Flash Pattern:	Rotating
Lens Colour:	Amber
Lens Type:	69mm Polycarbonate twist on/off
Number of LED's:	15 x Amber LED's
Voltage:	12-80 Volt
Current Draw:	0.07amps @ 12 Volt and 0.035amps @ 24 Volt
Mounting:	Magnetic
Housing:	Plastic
Connections:	Cigarette Plug
Dimensions:	Height: 93mm. Base Width: 130mm. Lens Width: 85mm
Warranty:	1 year
Approvals:	CE Approval



LS9790 Amber LED Rotating Beacon.

The LS9790 has a 2 bolt plastic mounting base.

Features:

Flash Pattern:	Rotating
Lens Colour:	Amber
Lens Type:	100mm Polycarbonate twist on/off
Number of LED's:	15 x Amber LED's
Voltage:	12-80 Volt
Current Draw:	0.07amps @ 12 Volt and 0.035amps @ 24 Volt
Mounting:	2 Bolt
Housing:	Plastic
Connections:	Red = Positive. Black = Negative.
Dimensions:	Height: 130mm. Base Width: 97mm. Lens Width: 58mm
Warranty:	1 year
Approvals:	CE Approval




LS9795 Amber LED Strobe Light.

The LS9795 has a 2 bolt plastic mounting base.

Features:

Flash Pattern:	Strobe, 80 Quad flashes per minute
Lens Colour:	Amber
Lens Type:	110mm Polycarbonate
Number of LED's:	27 x Amber LED's
Voltage:	12-80 Volt
Current Draw:	0.9amps @ 12 Volt and 0.45amps @ 24 Volt
Mounting:	2 bolt
Housing:	Plastic
Connections:	Red = Positive. Black = Negative.
Dimensions:	Height: 65mm. Length: 139mm. Width: 57mm
Warranty:	1 year
Approvals:	CE Approval

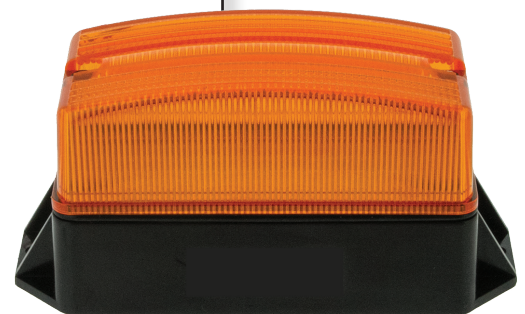

email sales@cooldrive.com.au web: www.cooldrive.com.au