




UNIVERSAL HIGH FLOW BULLET CATALYTIC CONVERTERS

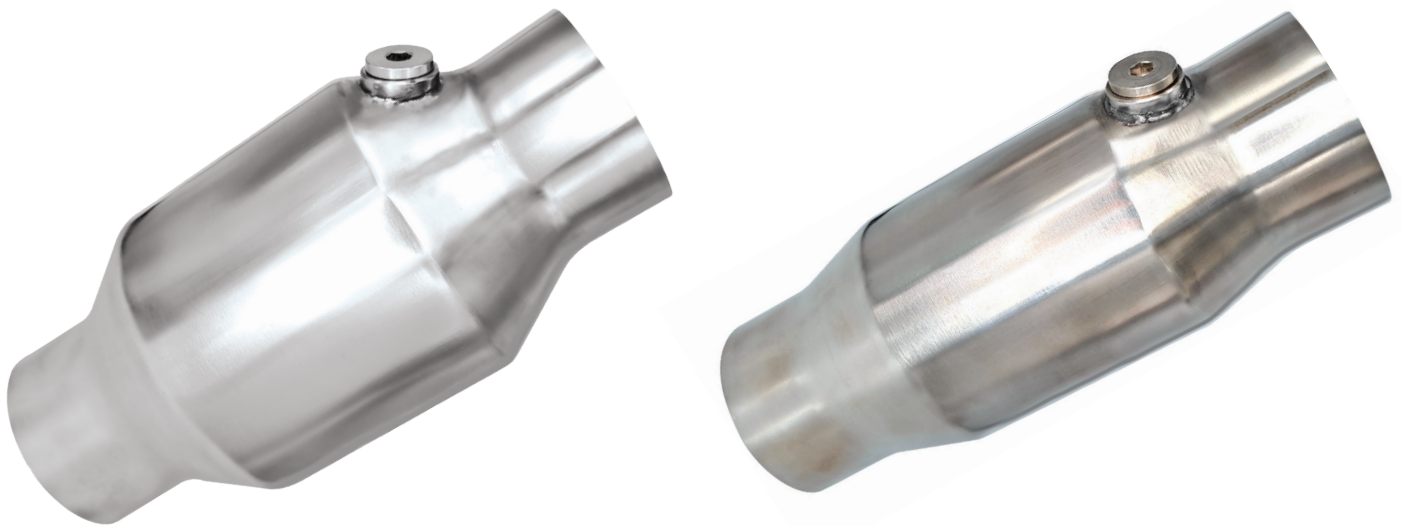

Aunger introduces new Universal High Flow Bullet Catalytic Converters tailored for universal fitment through a seamless slip-fit design, these converters are designed for versatility and performance across various vehicle applications.

Key Features:

- **Superior Construction:** Each converter boasts a high-grade, mirror-polished SS409 stainless steel body for maximum durability and aesthetic appeal.
- **Enhanced Performance:** Designed as Heavy Duty High Flow Cats, they ensure reduced backpressure and optimised exhaust flow for improved vehicle efficiency and power.
- **Dependability and Precision:** Quality you can trust with the inclusion of an oxygen sensor for accurate emissions monitoring and optimal engine function.
- **Advanced Core Options:** Catering to diverse needs, the converters come with either a metallic core for 100 or 200 cell configurations or a ceramic core for 400 cell setups.
- **Customisable:** Available with or without a heat shield and in 4" and 5" sizes, as well as compliant with Euro 6 standards.



UNIVERSAL HIGH FLOW BULLET CATALYTIC CONVERTERS

Part No	Description	ID/OD	Body length	Diameter of Round Body
AMCAT2004-1	1. High grade mirror polished SS409 body 2. Metallic core (100 cell) 3. With Oxygen sensor"	2.0" to 2.0"	"7.0" (Body length)	4.0"
AMCAT2254-1	1. High grade mirror polished SS409 body. 2. Metallic core (100 cell) 3. With Oxygen sensor"	2.25" to 2.25"	"7.0" (Body length)	4.0"
AMCAT2504-1	1. High grade mirror polished SS409 body 2. Metallic core (100 cell) 3. With Oxygen sensor"	2.5" to 2.5"	"7.0" (Body length)	4.0"
AMCAT3004-1	1. High grade mirror polished SS409 body 2. Metallic core (100 cell) 3. With Oxygen sensor"	3.0" to 3.0"	"7.0" (Body length)	4.0"
AMCAT2504-2	1. High grade mirror polished SS409 body 2. Metallic core (200 cell) 3. With Oxygen sensor"	2.5" to 2.5"	"7.0" (Body length)	4.0"
AMCAT3505-1	1. High grade mirror polished SS409 body 2. Metallic core (100 cell) 3. With Oxygen sensor"	3.5" to 3.5"	"7.0" (Body length)	5.0"
AMCATS250-1	1. High grade mirror polished SS409 body. 2. Metallic core (100 cell) 3. With Oxygen sensor"	2.5" to 2.5"	"4.25 (Body length)	4.0"
AMCATS300-1	1. High grade mirror polished SS409 body 2. Metallic core (100 cell) 3. With Oxygen sensor"	3.0" to 3.0"	"4.25 (Body length)	4.0"
AMCAT3004-2	1. High grade mirror polished SS409 body 2. Metallic core (200 cell) 3. With Oxygen sensor"	3.0" to 3.0"	"7.0" (Body length)	4.0"
ACCAT2004-E6	1. High grade mirror polished SS409 body 2. Ceramic core (400 cell) 3. With Oxygen sensor"	2.0" to 2.0"	"10.0" (Body length)	4.0"